
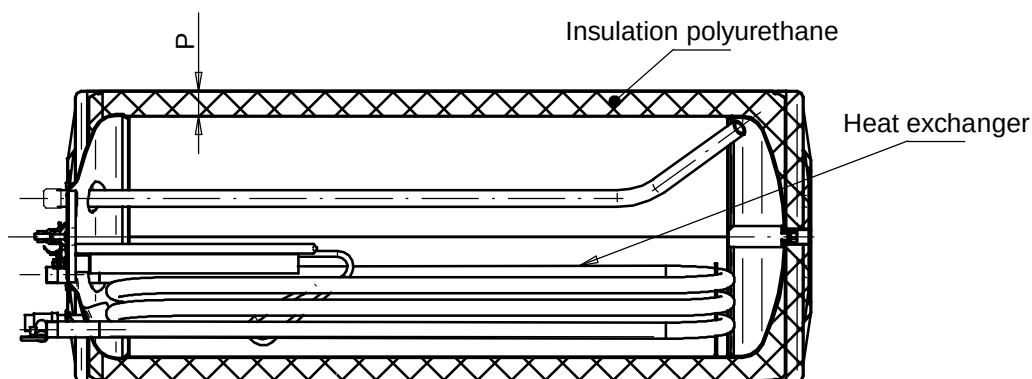
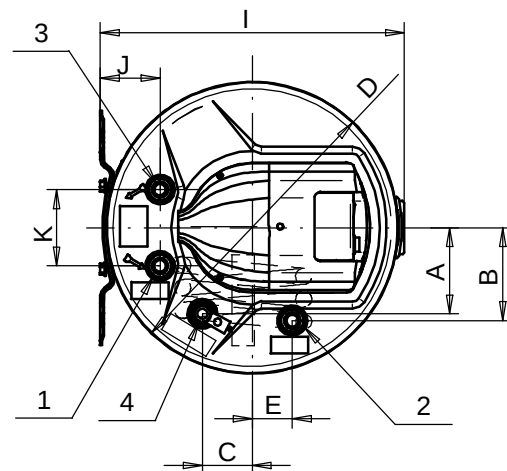


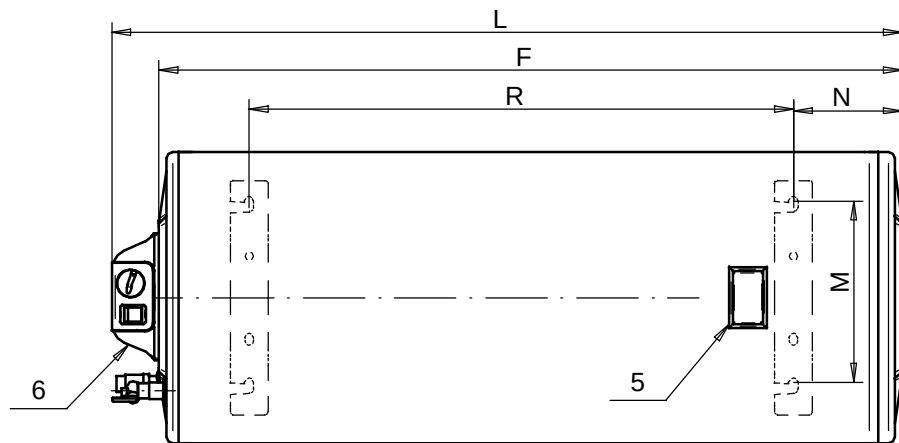

Wall mounting water heaters with heat exchanger		72268XT	72268HXT
CHARACTERISTICS		Enameled	Stainless
Rated volume	L	80	
Rated voltage	V	220-230~	
Rated electrical power	kW	2(3)	
Rated presure	bar	6	
Maximum D.H.W. tank temperature in	°C	75	
Heat exchange surface area	m²	0,36	0,48
Heat exchange power	kW	7,8	-
Heat exchange inside volume	L	1,4	2,51
Weight when empty	kg	30,5	24
CONNECTIONS			
1: Heating coil - Feed	"GAS/M	1/2	
2: Heating coil - Return	"GAS/M	1/2	
3: Hot water outlet	"GAS/M	1/2	
4: Fresh water inlet (Drain) Safety valve	"GAS/M	1/2	
5: Temperature indicator	-	-	
6: Control panel	-	-	
DIMENSIONS			
Level A	mm	114	
Level B	mm	123	
Level C	mm	66	
Level E	mm	53	
Level D	mm	Ø385	
Level F	mm	980	
Level I	mm	400	
Level J	mm	73	
Level K	mm	100	
Level L	mm	1045	
Level M	mm	240	
Level N	mm	144	
Level P	mm	32	
Level R	mm	720	